

application



- An efficient alternative in industrial lighting applications.

construction & features

- Heavy duty mounting chains or cables with hangers (order separately).
- 95% reflective specular aluminum reflectors maximize luminaire efficiency and control light distribution.
- Steel housing with white polyester powder finish.
- Electronic ballast(s).
- Rotating ring, locking type lampholders for T5HO lamps, locking type for T8 lamps.
- Quarter turn fasteners allow reflector to swing down for easy access to ballasts.

electrical

- cULus listed suitable for damp location.
- Open 4 and 6 lamp units are rated for use in 55°C ambient. Open 8 lamp units are rated for use in 50°C ambient. Enclosed units are rated for use in 40°C ambient.

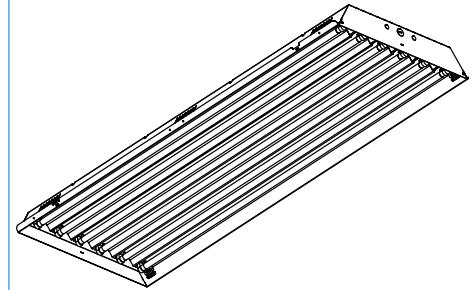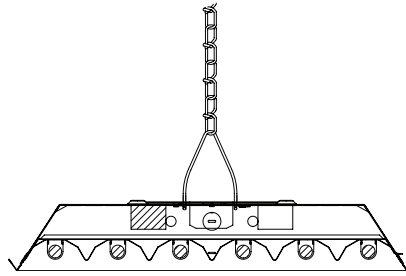

Specifier's Reference

Project
Type
Model No.
Comments



FBF/FBE Chain Kits



FBF/FBE-Grip5



Center Mount with 3/4" Conduit ("CMP" option)




Center Mount with Hook ("CMH" option)



MD360

Green Choice: FBD654HO-UNV-1/42-EB

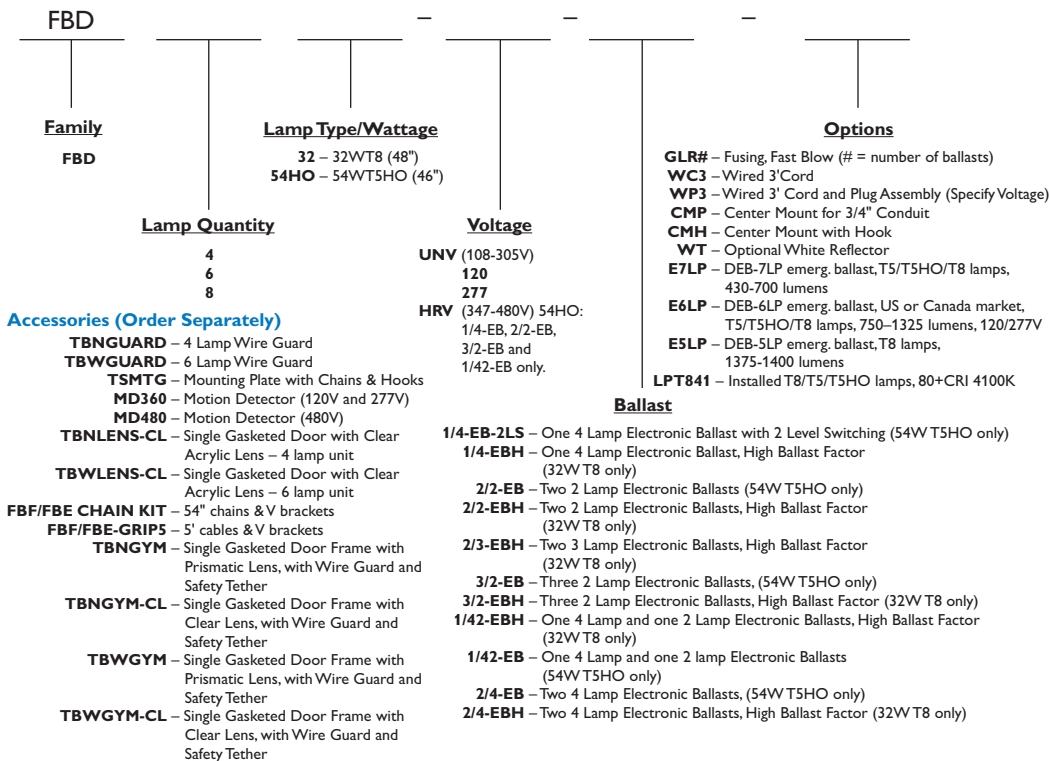

energy data

Lamp Watts	Ballast Type	Input Watts
32	1/4-EBH	146
	2/2-EBH	148
	2/3-EBH	222
	3/2-EBH	222
	1/42-EBH	222
54	1/4-EB	240
	2/2-EB	240
	3/2-EB	360

General Notes

All options factory installed. All accessories are field installed. "EBH" for T8 lamps is 1.15-1.2 BF. "EB" for T5HO lamps is 1.0 BF. Order "TBNGYM" or "TBWGYM" if wire guard and door are both required.




# HB-10032


## dimensions

# FBD Fluorescent, T8 or T5/HO Fluorescent

### 6 Lamp (shown) and 8 lamp

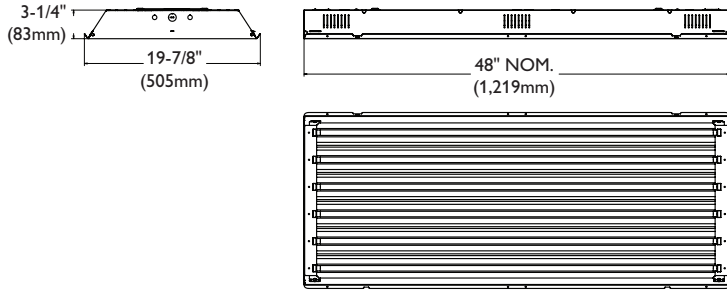

### 4 Lamp

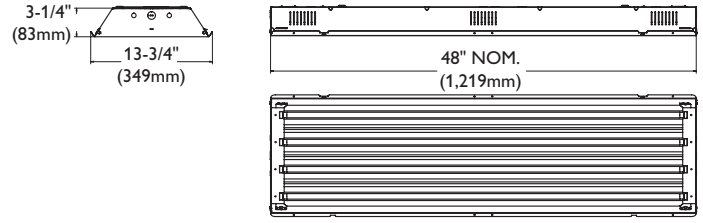

## photometry

### 6 Lamp F54T5HO

Efficiency – 91.2%

LER – 73

TER – 37

Catalog No.	FBD654HO-UNV-1/42-EB
Test No.	29065
Medium Spread S/MH	1.3
Lamp Type	F54T5HO
Lumens/Lamp	4400
Ballast Factor	1.0
Input Watts	331

#### Candlepower

Angle	End	45	Cross
0	10428	10428	10428
5	10522	10309	10283
10	10372	10157	10156
15	10119	9895	9869
20	9785	9534	9242
25	9356	8947	8208
30	8835	8090	7240
35	8240	7090	6452
40	7574	6153	5673
45	6833	5368	4653
50	6049	4541	3680
55	5210	3574	3139
60	4341	2648	2902
65	3446	2213	2408
70	2538	1864	1664
75	1664	1203	995
80	875	603	426
85	270	136	107

#### Light Distribution

Degrees	Lumens	% Lamp	% Luminaire
0-30	7812	29.6	32.4
0-40	12346	46.8	51.3
0-60	20068	76.0	83.3
0-90	24084	91.2	100.0

#### Average Brightness

Zone	End	45	Cross
45	16867	13251	11486
55	15855	10876	9553
65	14233	9140	9946
75	11222	8113	6710
85	5407	2724	2143

Comparative yearly lighting energy cost per 1000 lumens – \$3.38 based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

#### Coefficients of Utilization

##### EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

Ceil	80				70				50				30				10			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10			
0	109	109	109	109	106	106	106	106	101	101	101	97	97	97	93	93	93			
1	100	96	93	89	98	94	91	88	90	88	85	87	84	82	83	82	80			
2	92	85	79	74	89	83	78	73	80	75	71	77	73	70	74	71	68			
3	84	75	68	62	82	74	67	62	71	65	61	68	64	60	66	62	59			
4	77	67	59	54	75	66	59	53	63	57	52	61	56	52	59	55	51			
5	71	60	52	47	69	59	52	46	57	51	46	56	50	45	54	49	45			
6	66	54	47	41	64	54	46	41	52	45	41	51	45	40	49	44	40			
7	61	50	42	37	60	49	42	36	48	41	36	46	40	36	45	40	36			
8	57	45	38	33	56	45	38	33	44	37	33	43	37	32	42	36	32			
9	54	42	35	30	52	41	34	30	40	34	30	39	34	29	38	33	29			
10	50	39	32	27	49	38	32	27	37	31	27	37	31	27	36	31	27			

### 4 Lamp F54T5HO

Efficiency – 92.9%

LER – 71

TER – 37

Catalog No.	FBD454HO-UNV-1/4-EB
Test No.	29068
Medium Spread S/MH	1.3
Lamp Type	F54T5HO
Lumens/Lamp	4400
Ballast Factor	1.0
Input Watts	230

#### Candlepower

Angle	End	45	Cross
0	6971	6971	6971
5	7153	6819	7106
10	7054	6813	7043
15	6893	6701	6865
20	6653	6411	6340
25	6369	6013	5630
30	6020	5421	4947
35	5612	4789	4395
40	5148	4136	3918
45	4651	3566	3321
50	4110	3070	2614
55	3529	2563	2224
60	2942	1885	2030
65	2329	1494	1616
70	1730	1241	1059
75	1134	780	613
80	609	362	251
85	179	75	69

#### Light Distribution

Degrees	Lumens	% Lamp	% Luminaire
0-30	5298	30.1	32.4
0-40	8375	47.6	51.2
0-60	13681	77.7	83.6
0-90	16359	93.0	100.0

#### Average Brightness

Zone	End	45	Cross
45	16992	13028	12133
55	15894	11544	10017
65	14236	9132	9878
75	11319	7785	6119
85	5306	2223	2045


Comparative yearly lighting energy cost per 1000 lumens – \$3.20 based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

#### Coefficients of Utilization

##### EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

Ceil	80				70				50				30				10			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10			
0	111	111	111	111	108	108	108	108	103	103	103	99	99	99	95	95	95			
1	102	98	94	91	100	96	93	90	92	89	87	88	86	84	85	83	82			
2	93	86	80	75	91	85	79	75	81	77	73	78	75	71	76	72	70			
3	86	76	69	64	83	75	68	63	72	67	62	70	65	61	67	63	60			
4	79	68	61	55	77	67	60	54	65	58	54	63	57	53	61	56	52			
5	73	61	53	48	71	60	53	47	58	52	47	57	51	46	55	50	46			
6	67	56	48	42	66	55	47	42	53	46	41	51	46	41	50	45	41			
7	63	51	43	37	61	50	42	37	48	42	37	47	41	37	46	40	36			
8	58	46	39	33	57	46	38	33	45	38	33	43	37	33	42	37	33			
9	55	43	35	30	53	42	35	30	41	35	30	40	34	30	39	34	30			
10	51	39	32	28	50	39	32	28	38	32	27	37	31	27	36	31	27			

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)



© 2014 Koninklijke Philips N.V. All rights reserved. Specifications are subject to change without notice. [www.philips.com/luminaires](http://www.philips.com/luminaires)

Philips Lighting  
North America Corporation  
200 Franklin Square Drive  
Somerset, NJ 08873  
Phone: 855-486-2216

Philips Lighting Company  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008